

FLUSH 2507



Quick facts


- Wide range of LED options available on request
- Available in 2700k, 3000k, 4000k, 5500k, and RGB
- High quality 6063 T5 grade Aluminium
- PC UV stabilised LED compound Diffuser
- Extends LED life by providing great thermal dissipation and heat transfer away from LEDs
- Wide range of applications, ceiling mount, wall mount, under cabinet
- Custom powder coat colours available on Request
- For Indoor use

Technical Data:


Code	Description	Width	Height	Install Depth	Max length
FLUSH 2507	Anodised Extrusion	25mm	7mm	5.4mm	2500mm
FLUSH 2507-EC	Silver End Cap	25mm	7mm	5.4mm	2mm

*When ordering if custom colours are required please specify DULUX or Interpon powder coat colour codes.

Dimensions:

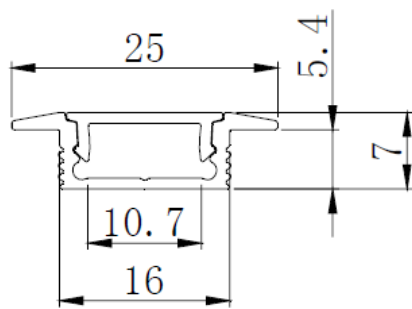

Cross Section

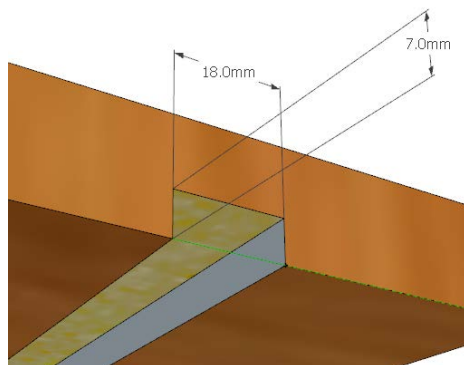

Cut Out